


Unidrum Lever

Metric Push-Pull and Pull-Only Hand Control

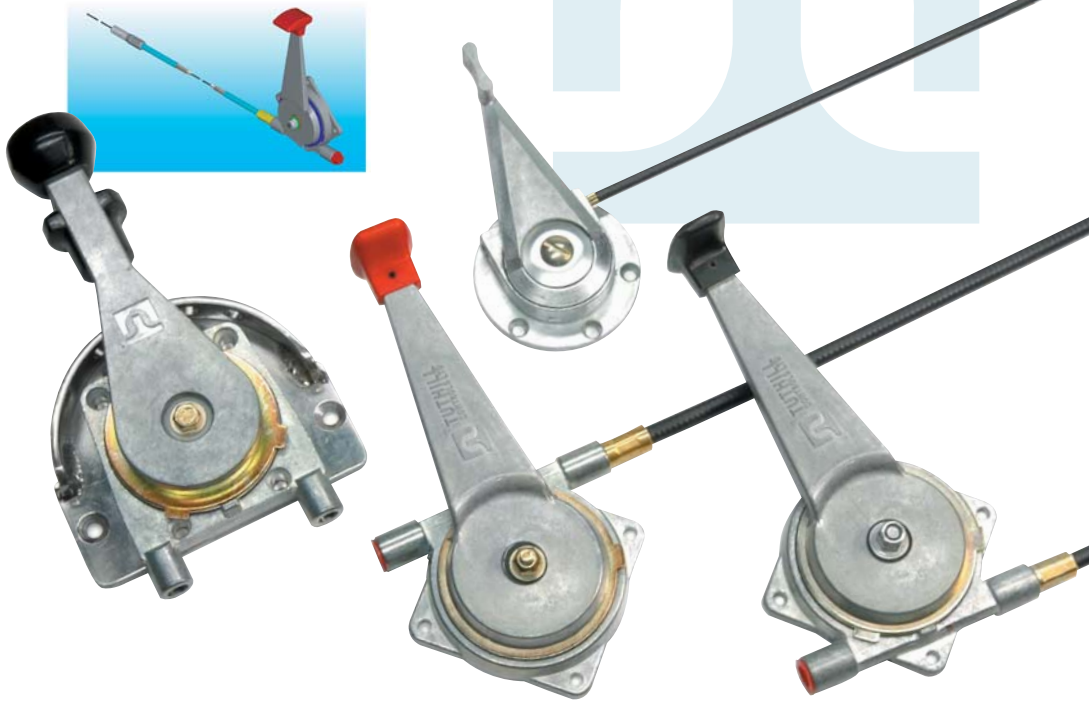

Hand Control Industrial

A control head designed primarily for hand throttle applications on commercial and industrial vehicles, and also suitable for many other uses. Compact and efficient for imparting light-to-medium pull-only or push-pull loads through flexible conduits and inner-members. Unidrum controls hold and operate up to 12kg push-pull or pull-only output loads. Mechanical advantage at knob is 5 to 1. There is a self locking nut for operator adjustment of friction setting. The adjustable stop plates allow 10° (5mm linear output) incremental travel adjustment. 50mm of cable travel requires approximately 90° lever travel. 75mm of cable requires approximately 135° lever travel. The lever position is adjustable in 60° increments to provide optimum operating range. Optional cable entry offers four mountings/directions of operation alternatives. Also available with a smaller handle for light duty applications or with a locking handle.



Description:

Unidrum Lever
Industrial Metric Push-Pull
and Pull-Only Hand Control

Applications:

- Medium to light duty throttle compactors
- Valve dump control jackhammers
- Hydraulic valve control concrete cutters
- Backhoe throttle

Features:


- Adjustable friction lock
- 5 to 1 mechanical advantage
- Adjustable mechanical stops

Other Related Products:

- All other hand levers


Unidrum Lever

- Hold and operate up to 11kg push-pull or pull-only output load. Mechanical advantage at knob is 5/1.
- Self-locking nut for operator adjustment of friction setting.
- Adjustable stop plates allow 10° incremental travel adjustment.
- Lever position is adjustable in 60° increments.
- Four optional cable entry alternatives.
- Rugged diecast zinc alloy material.
- Mount with (4) M5 screws or bolts.

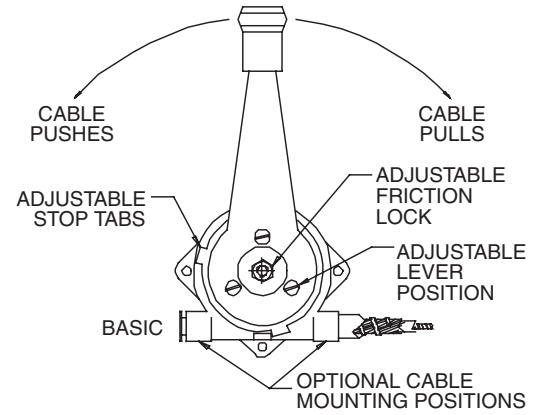


CH205/206

CH240

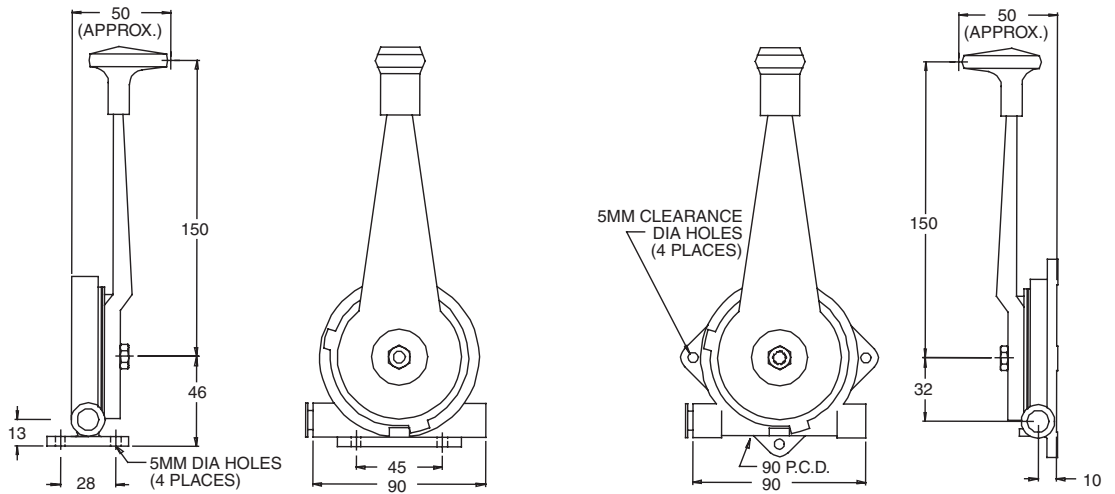


CH260

CH220 (Miniature)

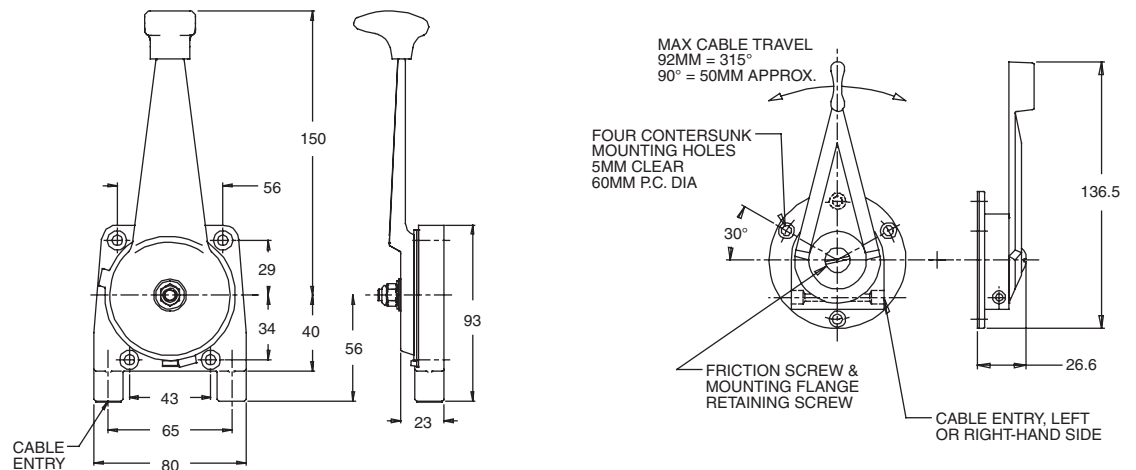


Cable Exit Positions

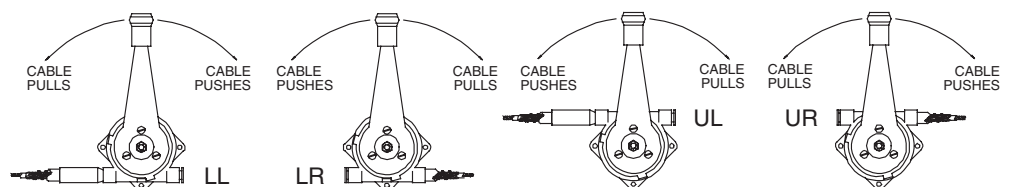

All line art dimensions are represented in millimeters

CH290 (Unidrum Operator Positive Lock)

- Hold and operate up to 12kg push-pull or pull-only output load. Mechanical advantage at knob is 5/1.
- Self-locking nut for operator adjustment of friction setting.
- Adjustable stop plates allow 10° (5.5mm linear output) incremental travel adjustment. 50mm of cable travel requires approximately 90° lever travel.
- Optional cable entry.
- Rugged diecast zinc alloy material.
- Side mount at 104 centres.

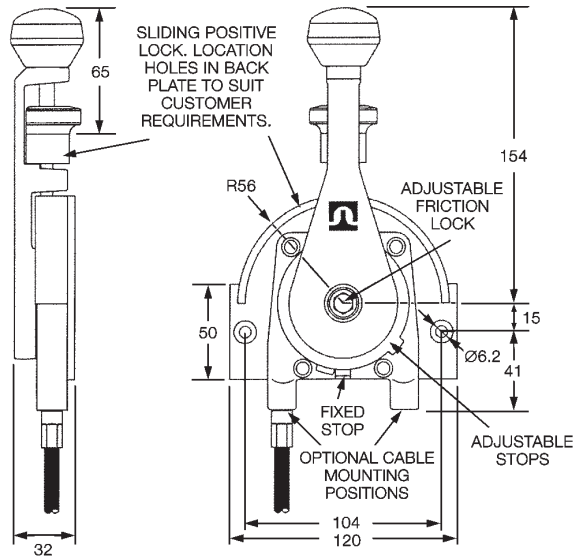


Output End Configurations

VLD Utility

1 Threaded Swivel

Dimension A Per Stroke
(extended)


50.8mm 176.28mm
76.2mm 227.07mm

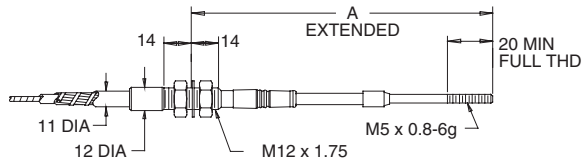

2 Grooved Swivel

Dimension A Per Stroke
(extended)

50.8mm 158.75mm
76.2mm 209.55mm

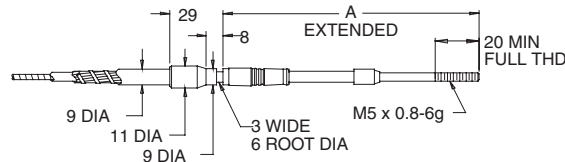


LD Utility

3 Threaded Swivel

Dimension A Per Stroke
(extended)


50.8mm 182.37mm
76.2mm 233.17mm

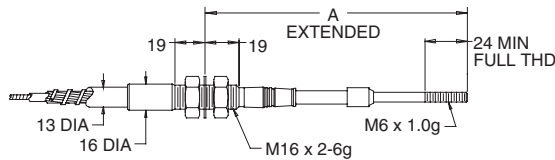


4 Grooved Swivel

Dimension A Per Stroke
(extended)


50.8mm 166.62mm
76.2mm 217.42mm

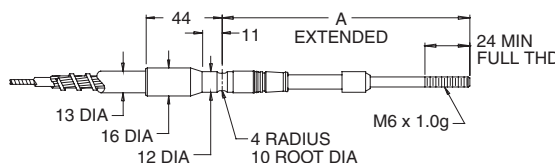

VLD Bristow®



5 Threaded Cap



6 Grooved Cap

Output End Configurations Codes

- 1 Threaded Swivel
- 2 Grooved Swivel
- 3 Threaded Swivel
- 4 Grooved Swivel
- 5 Threaded Cap
- 6 Grooved Cap

Unidrum Lever Order Code

Material

- Zinc Based Die-Cast Body, Drum and Lever
- Internal Long Life Nylon Bearings
- Optional Black Powder Coat Paint Finish

Linking Motion & Control...
The Tuthill Solution



Cablecraft® Ordering Codes

UDI - 1 - 4 - 4 - 2 - 3050

Basic Unidrum Lever

Knob Color

- 1 Black 165-505-101
- 2 Red 165-505-102

Cable Exit Position (see illustration)

- 1 Lower Mount, Left Exit
- 2 Lower Mount, Right Exit
- 3 Upper Mount, Left Exit
- 4 Upper Mount, Right Exit

Output End Configuration, Cable Size & Type

	Style	Size	Type
1	Threaded Swivel	VLD	Utility
2	Grooved Swivel	VLD	Utility
3	Threaded Swivel	LD	Utility
4	Grooved Swivel	LD	Utility
5	Threaded Cap	VLD	Bristow®
6	Grooved Cap	VLD	Bristow®

Travel (mm)

	Cable	Lever
2	50	approx. 90°
3	75	approx. 135°

Overall Length (mm)

Replacement Cables

Part Number	Duty	Cap	Travel
A17X-330	LD	T	50
A17X-331	LD	T	75
A17X-332	LD	G	50
A17X-333	LD	G	75
A17X-530	VLD	T	50
A17X-531	VLD	T	75
A17X-532	VLD	G	50
A17X-533	VLD	G	75

• Please refer to the cautions/warnings and appropriate installation usage information in the Technical/Application Data sheet
• For application assistance/technical questions, please contact us at the appropriate location listed below or through our website at www.tuthillcontrols.com



TUTHILL
Controls Group

4401 South Orchard Street
Tacoma, Washington 98466 USA
Tel 253 475-1080 Fax 253 474-1623

2110 Summit Street
New Haven, Indiana USA 46774
Tel 260 749-5105 Fax 260 493-2387
www.tuthillcontrols.com

Diplocks Way-South Road
Hailsham, East Sussex BN27 3JF, England
Tel 44 1323 841510 Fax 44 1323 845848

Hingbergstrasse 79
45468 Mulheim an Der Rhur, Germany
Tel 49-208-300-650 Fax 49-208-300-6550